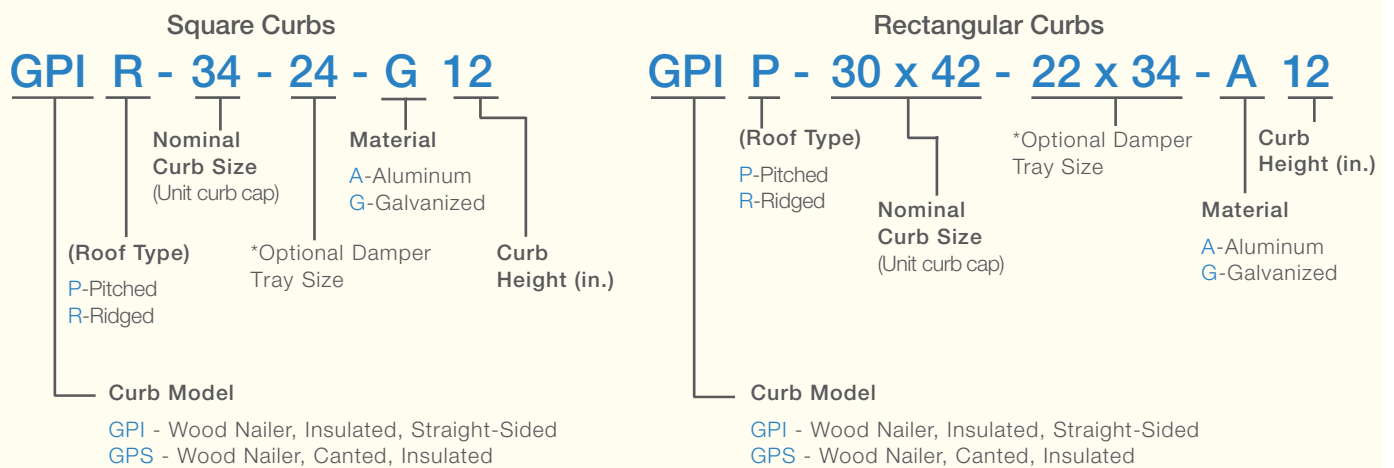


Accurex offers prefabricated roof curbs, which reduce installation time and costs by ensuring compatibility between the unit, curb and roof opening. A wide variety of roof curbs are available, including: flanged, straight-sided, canted, pitched, and ridged. Extensions are also available and can provide an accessible mounting location for dampers.

Model Number Code

The Model Number Code is designed to completely identify the roof curb. The correct code letters must be specified to designate configurations and size.








*Shown only when specified

Roof Curbs

Model Comparison

Equipment Supports and Curb Extensions

| Roof Curb | Roof Type/ Application | Description | Model and Service |
|---|--|---|--|
|  | Flat, insulated or non-insulated roof decks | Welded, straight-sided construction with rigid fiberglass insulation and 2 inch mounting flange. These curbs are designed for roof decks that are covered with 2 to 6 inches of insulation. Models GPI and GPIP are standard with fully welded construction, wood nailer, 1-inch insulation and 2-inch flashing flange. Model GPI is for use on flat roofs and GPIP for pitched roofs. Models are available in heights of 12 to 24 inches. | GPI - Galvanized 12 in. high, with or without damper tray, square sizes for stock fans |
|  | Flat, pitched or ridged, insulated or non-insulated roof decks | Welded, straight-sided construction with rigid fiberglass insulation and 2 inch mounting flange. These curbs are designed for roof decks that are covered with 2 to 6 inches of insulation. Models GPI and GPIP are standard with fully welded construction, wood nailer, 1-inch insulation and 2-inch flashing flange. Model GPI is for use on flat roofs and GPIP for pitched roofs. Models are available in heights of 12 to 24 inches. | GPI - Aluminum or galvanized, other heights, non-stock square and rectangular sizes |
|  | Flat, non-insulated roof decks | Welded, canted construction with rigid fiberglass insulation. This curb is designed for use on flat, non-insulated roof decks. It consists of a fully welded body and 1-inch of insulation. | GPS - All types, sized to meet your requirements |
| Adapters | | | |
|  | Adaptors/ Reducers | Used to match new fans to existing roof curbs. Welded galvanized steel or aluminum. | Curb Adaptors and Reducers |
| Equipment Supports | | | |
|  | Insulated and non-insulated roof decks | Welded aluminum or galvanized steel. Available in heights of 8, 12 and 14 inches and widths of 4, 6 and 8 inches. | GESS - All types, sized to meet your requirements |

For complete product information contact your local Accurex representative.