

Indirect Gas-Fired Performance and Dimensional Data XIGX.

Housing 12

Blower Size	CFM		Total Static Pressure (in. wg)						Max MBH (Input)
			0.50	0.75	1.00	1.25	1.50	1.75	
108	800	RPM	993	1109	1216	1311	1399	-	100
		BHP	0.21	0.26	0.31	0.35	0.40	-	
	1,200	RPM	1238	1347	1445	1530	-	-	150
		BHP	0.51	0.59	0.68	0.75	-	-	
109	1,500	RPM	880	1014	1140	1255	1361	1460	200
		BHP	0.36	0.45	0.54	0.63	0.73	0.84	
	2,500	RPM	1154	1244	1329	1419	1503	1587	250
		BHP	1.1	1.2	1.4	1.6	1.7	1.9	
110	2,500	RPM	906	995	1082	1166	1247	1325	250
		BHP	0.79	0.93	1.1	1.2	1.4	1.5	
	3,500	RPM	1131	1202	1275	1340	1401	1464	250
		BHP	1.8	2.0	2.2	2.4	2.6	2.8	

Housing 22


Blower Size	CFM		Total Static Pressure (in. wg)						Max MBH (Input)
			0.50	0.75	1.00	1.25	1.50	1.75	
112	2,600	RPM	662	761	853	934	1009	-	350
		BHP	0.58	0.72	0.86	1.0	1.2	-	
	4,400	RPM	871	939	1006	1073	1137	1197	600
		BHP	1.8	2.1	2.4	2.6	2.9	3.1	
115	5,000	RPM	671	741	808	871	931	986	600
		BHP	1.7	2.0	2.3	2.6	2.9	3.2	
	7,000	RPM	833	889	943	994	1044	1093	600
		BHP	3.7	4.2	4.6	5.0	5.5	5.9	

Housing 32

Blower Size	CFM		Total Static Pressure (in. wg)						Max MBH (Input)
			0.50	0.75	1.00	1.25	1.50	1.75	
118	7,000	RPM	566	627	685	738	790	839	1,050
		BHP	2.1	2.5	2.8	3.2	3.6	4.0	
	10,000	RPM	712	759	805	849	891	933	1,200
		BHP	5.0	5.5	6.1	6.6	7.1	7.7	
120	10,000	RPM	542	590	634	678	723	765	1,200
		BHP	3.6	4.0	4.5	5.0	5.6	6.1	
	15,000	RPM	731	763	795	829	861	892	1,200
		BHP	10.2	10.9	11.6	12.3	13.1	13.8	

Note: The air performance data shown does not include internal static pressure losses due to items such as filters, dampers and furnaces. For exact air performance data based on specific unit configuration, contact your local Accurex representative.

Indirect Gas-Fired Performance and Dimensional Data XIGX.

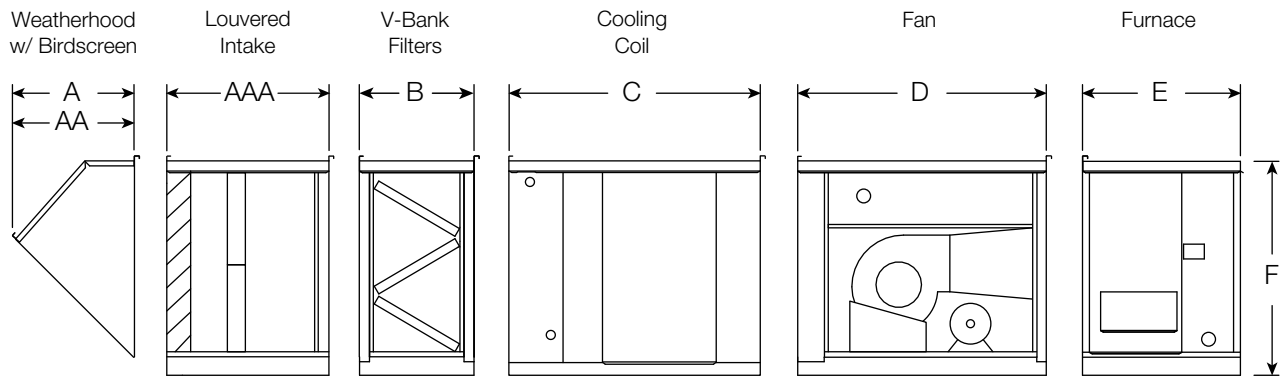

*AA - Filtered Weatherhood

Housing Size	A	AA	AAA	B	C		D	Furnace Size	E	F	Width
					Low	High					
H12	29.9	31.5	13.8	21.5	30.0	50.4	42.5	100-250	33.2	39	44.6
H22	45.6	47.1	16.9	24.0	30.0	69.4	52.2	150-300	33.2	44.9	44.6
								350-400			53.9
								500-600	66.4		44.6
H32	47.3	48.7	16.9	25.8	98.0	66	350-400	33.2	48.7	52.2	
							500-800				66.4
							1050-1200	99.6			