

Modular Supply

Performance and Dimensional Data

XMSX.

Housing Size 12

Model	CFM		Total Static Pressure (in. wg)					
			0.50	0.75	1.00	1.25	1.50	1.75
XMSX-108	800	RPM	993	1109	1216	1311	1399	
		BHP	0.21	0.26	0.31	0.35	0.40	
	1,200	RPM	1238	1347	1445	1530		
		BHP	0.51	0.59	0.68	0.75		
XMSX-109	1,500	RPM	880	1014	1140	1255	1361	1460
		BHP	0.36	0.45	0.54	0.63	0.73	0.84
	2,500	RPM	1154	1244	1329	1419	1503	1587
		BHP	1.1	1.2	1.4	1.6	1.7	1.9
XMSX-110	2,500	RPM	906	995	1082	1166	1247	1325
		BHP	0.79	0.93	1.1	1.2	1.4	1.5
	3,500	RPM	1131	1202	1275	1340	1401	1464
		BHP	1.8	2.0	2.2	2.4	2.6	2.8

Housing Size 22

Model	CFM		Total Static Pressure (in. wg)					
			0.50	0.75	1.00	1.25	1.50	1.75
XMSX-112	2,600	RPM	662	761	853	934	1009	
		BHP	.58	.72	.86	1.0	1.2	
	3,500	RPM	756	839	920	993	1065	1133
		BHP	1.0	1.3	1.5	1.7	1.9	2.1
	4,400	RPM	871	939	1006	1073	1137	1197
		BHP	1.8	2.1	2.4	2.6	2.9	3.1
XMSX-115	5,000	RPM	671	741	808	871	931	986
		BHP	1.7	2.0	2.3	2.6	2.9	3.2
	6,000	RPM	749	812	870	929	982	1035
		BHP	2.6	2.9	3.3	3.7	4.0	4.4
	7,000	RPM	833	889	943	994	1044	1093
		BHP	3.7	4.2	4.6	5.0	5.5	5.9

Housing Size 32


Model	CFM		Total Static Pressure (in. wg)					
			0.50	0.75	1.00	1.25	1.50	1.75
XMSX-118	7,000	RPM	566	627	685	738	790	839
		BHP	2.1	2.5	2.8	3.2	3.6	4.0
	8,500	RPM	636	690	740	790	836	880
		BHP	3.3	3.8	4.2	4.7	5.1	5.6
	10,000	RPM	712	759	805	849	891	933
		BHP	5.0	5.5	6.1	6.6	7.1	7.7
XMSX-120	10,000	RPM	542	590	634	678	723	765
		BHP	3.6	4.0	4.5	5.0	5.6	6.1
	12,500	RPM	633	672	711	748	784	820
		BHP	6.3	6.9	7.5	8.1	8.7	9.3
	15,000	RPM	731	763	795	829	861	892
		BHP	10.2	10.9	11.6	12.3	13.1	13.8

Note: The air performance data shown does not include internal static pressure losses due to items such as filters, dampers and coils. For exact air performance data based on specific unit configuration, contact your local Accurex representative.

Modular Supply

Performance and Dimensional Data

XMSX.

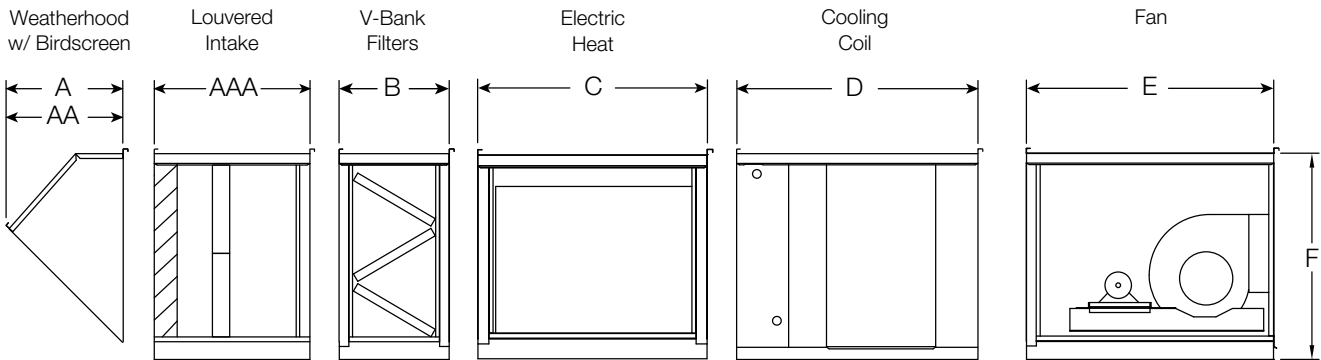

*AA - Filtered Weatherhood

Housing Size	A	AA	AAA	B	C	D		E	F	Width
						Low	High			
H12	29.9	31.5	13.8	21.5	43.9	30	50.4	42.5	39.0	33.6
H22	45.6	47.1	16.9	24.0		30	69.4	52.2	44.9	44.1
H32	47.3	48.7	16.9	25.8	48.0	98.0		66.0	48.7	53.1

Housing Size	Max kW
H12	70
H22	140
H32	220